



**MORE
THAN
PARTS**

MOTORI INDUSTRIALI

KUBOTA ENGINE PARTS 05-2026



International Automotive Parts

**QUALITY
PARTS**

CONSIDERAZIONI GENERALI

1.1 PREMESSA

Quanto contenuto in questo catalogo è basato sulle più recenti informazioni disponibili al momento della preparazione dello stesso. Ogni sforzo è stato fatto per assicurare che le informazioni contenute siano corrette. Tuttavia non ci possiamo assumere alcuna responsabilità per gli errori eventualmente presenti.

I prodotti della gamma **IAP Quality Parts®** non sono originali ma perfettamente intercambiabili. Eventuali riferimenti a nomi di costruttori sono stati indicati solo come guida per il Cliente.

Figure, illustrazioni e altre informazioni sono fornite a solo titolo esplicativo e potrebbero subire variazioni.

Everything contained in this catalogue is based on the last informations available at the time of printing. Every effort has been made to ensure that the informations contained are correct. Anyway we can not assume any responsibility for errors which may occur.

"Quality Parts®" products are not original but perfectly interchangeable with the original ones. All references to manufactures names are only used as a guide for the customer.

Pictures, figures, and other data are provided solely to explain and illustrate our products and could change.



1.2 CONDIZIONI GENERALI DI VENDITA

Prezzi

I prezzi sono da intendersi franco ns. sede IVA esclusa. I ns. listini possono essere modificati in ogni momento anche senza preavviso

Spedizioni

La merce viaggia a rischio e pericolo del compratore anche se resa in porto franco, non assumendoci responsabilità alcuna per eventuali danni subiti dopo che questa abbia lasciato i ns. depositi. Le mancate o ritardate consegne per cause da noi non dipendenti, non potranno dar luogo a richieste di danni ad alcun titolo e non potranno costituire motivo per rifiutare la merce o annullare l'ordine.

Resi e reclami

Non verranno accettati resi di merce o reclami pervenuti dopo 8 giorni dal ricevimento della merce. Eventuali resi di merce dovranno essere sempre preventivamente autorizzati ed avvenire in porto franco.

Garanzie

I prodotti riconosciuti difettosi e che non abbiano subito modifiche o manomissioni, potranno essere sostituiti entro 12 mesi dalla data di acquisto, previa compilazione del rapporto di garanzia. La garanzia in ogni caso è limitata alla sostituzione degli articoli difettosi con l'esclusione di ogni addebito per manodopera e ogni ns. responsabilità per eventuali danni conseguenti. Per riconoscere valida la garanzia ogni prodotto dovrà però essere accompagnato da una relazione tecnica dettagliata ed inviato franco ns. deposito. La garanzia non copre i difetti o danni causati da un differente utilizzo rispetto alle applicazioni indicate nel nostro catalogo, o per montaggio errato, eccessivo uso o da incidenti stradali.

Per il materiale di consumo (materiale frenante, filtri, frizioni, ecc.) la validità della garanzia è subordinata al chilometraggio effettuato.

Pagamenti

In caso di insolvenza o mancato rispetto dei termini di pagamento ci saranno dovuti interessi moratori, ad un tasso superiore di 5 punti rispetto a quello ufficiale di sconto ex art. 1224cc, fino al momento dell'effettivo saldo.

Foro giudiziario

Per qualunque controversia sarà competente esclusivamente l'autorità giudiziaria del Foro di Bologna



SOMMARIO/ TABLE OF CONTENTS

1.1 PREMESSA CONSIDERAZIONI GENERALI.....	2
1.2 CONDIZIONI GENERALI DI VENDITA.....	3
3D78-D1105.....	5
3D87-D1703.....	6
4D78-V1505.....	7
V2403.....	8
D722.....	10
V2203.....	12
Z482.....	14
1.3 ALTRI ARTICOLI / OTHER ITEMS	15

1



Il presente documento è di proprietà esclusiva di IAP s.r.l., che ne detiene tutti i diritti di riproduzione, diffusione, distribuzione e alienazione, nonché ogni ulteriore diritto individuato dalla vigente normativa in materia di diritto d'autore. Il presente documento ed il suo contenuto non possono pertanto essere ceduti, copiati, diffusi o riprodotti, nè citati, sintetizzati o modificati, anche parzialmente, senza l'esplicito consenso di IAP s.r.l.

TIPO MOTORE / ENGINE TYPE
3D78-D1105
ALESAGGIO 78

BORE

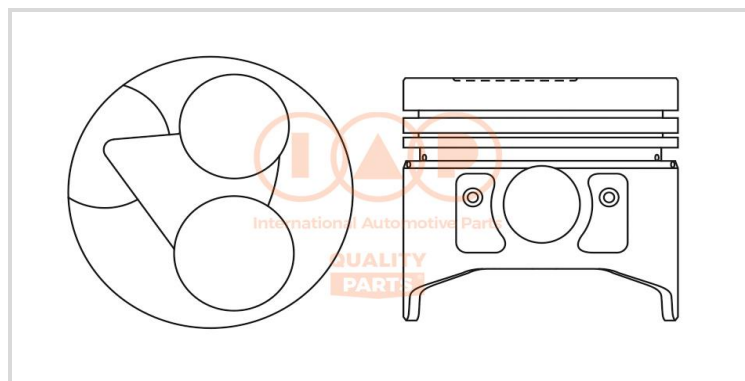
N° CILINDRI 3

N° OF CYLINDER

CILINDRATA 1.123

C.C.

CAPACITY C.C.



DESCRIZIONE / DESCRIPTION	CODE	NOTE
SERIE PISTONI /STD PISTON SET WITH RINGS / STD	100-40020	L=69.5,mm COMP. H=36.3 mm SPINOTTO/PIN L=60mm Ø= 60 mm
SERIE PISTONI /+0.50 PISTON SET WITH RINGS /+0.50	100-40021	L=69.5,mm COMP. H=36.3 mm SPINOTTO/PIN L=60mm Ø= 60 mm
SERIE SEGMENTI /STD RING SET/STD	102-40020	DIAM 78 mm 2.0 X 1.5 X 4.0
SERIE SEGMENTI/+0.50 RING SET /+0.50	102-40021	DIAM 78.50 mm 2.0 X 1.5 X 4.0
SERIE BRONZ. BIELLA/STD CONNECTING ROD BEARING SET/STD	104-40020	ØALES.O MIN/HOUSING MIN: 43,00mm LARGH.ZA/WIDTH:18.0 mm SPESS/THICK:1,80mm
SERIE BRONZ. BIELLA/+0.20 CONNECTING ROD BEARING SET/+0.20	104-40021	ØALES.O MIN/HOUSING MIN: 42.800mm LARGH.ZA/WIDTH:18.0 mm SPESS/THICK:1,80mm
SERIE BRONZ. BIELLA/+0.40 CONNECTING ROD BEARING SET/+0.40	104-40022	ØALES.O MIN/HOUSING MIN: 45.60 mm LARGH.ZA/WIDTH:18.0 mm SPESS/THICK:1,80mm
SERIE BRONZ. BANCO/STD MAIN BEARING SET /STD	105-40020	ØALES.O MIN/HOUSING MIN: 52.mm LARGH.ZA/WIDTH:18.6 mm SPESS/THICK:2.00mm
SERIE BRONZ. BANCO/+0.20 MAIN BEARING SET /STD	105-40021	ØALES.O MIN/HOUSING MIN: 51.80mm LARGH.ZA/WIDTH:18.6 mm SPESS/THICK:2.00mm
SERIE BRONZ. BANCO/+0.40 MAIN BEARING SET /STD	105-40022	ØALES.O MIN/HOUSING MIN: 51.60mm LARGH.ZA/WIDTH:18.6 mm SPESS/THICK:2.00mm
SERIE GUARNIZIONI SMERIGLIO CYLINDER HEAD GASKET SET	115-40020	C/GUARNIZIONE TESTATA W/CYLINDER HEAD GASKET
SERIE GUARNIZIONI MOTORE ENGINE GASKET SET	116-40020	C/GUARNIZIONE TESTATA W/CYLINDER HEAD GASKET

Applicazioni/Models :
Mini Scavatori/Mini Excavators : Kubota=> KX41-2, KX41-3, KX61-2, U25-3, U20

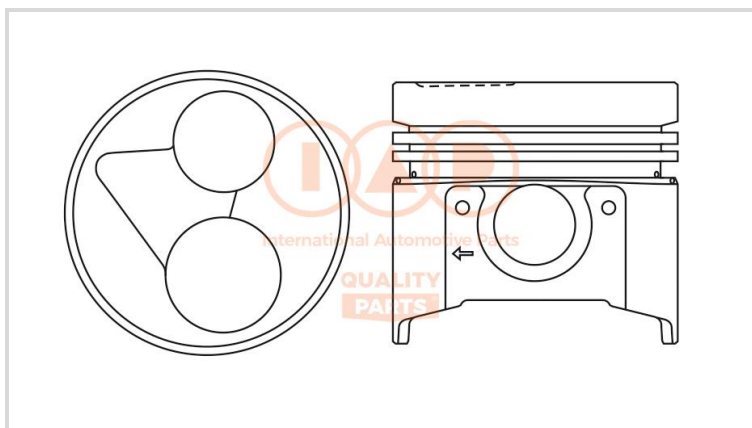
Minipale/ Skid Steer: Bobcat=> 463, MT52, MT55, MT85.

Trattori/Tractors: Kubota=> B2400, B2410, B26, B2630, B2620, B7610

Refrigeratori Semirimorchi= Thermo King=> SLX-100, SLX-200,SLX-300,SLX-400,SLX Spectrum, SLXe-200, SLXe-300, SLXe-400,SLXe Spectrum, Advancer A-400,Advancer A-500


TIPO MOTORE / ENGINE TYPE
3D87-D1703
ALESAGGIO **87,00 mm**
 BORE

N° CILINDRI **3**
 N° OF CYLINDER

CILINDRATA C.C. **1647**
 CAPACITY C.C


DESCRIZIONE / DESCRIPTION	CODE	NOTE
SERIE PISTONI /STD PISTON SET WITH RINGS / STD	100-40030	L=80mm COMP H.=43.5mm SPINOTTO/PIN 64mm Ø=25mm
SERIE PISTONI /+0.50 PISTON SET WITH RINGS /+0.50	100-40031	L=80mm COMP H.=43.5mm SPINOTTO/PIN 64mm Ø=25mm
SERIE SEGMENTI /STD RING SET/STD	102-40030	DIAM= 87.00 - 2.5 x 2.0 x 5.0
SERIE SEGMENTI/+0,50 RING SET /+0,50	102-40031	DIAM= 87.00 - 2.5 x 2.0 x 5.0

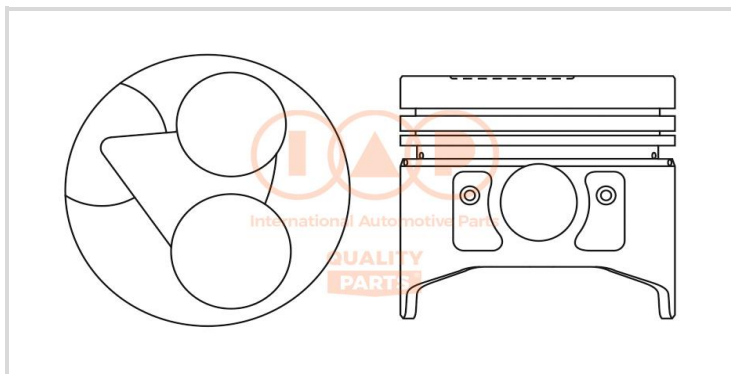
Applicazioni/Models :

Mini Scavatori-/Mini Excavators : Kubota=> KX71-3, KX91-3; Bobcat=> 325, 328, 329, 331,
;Komatsu=> PC20, PC25, PC27, PC30; Wacker Neuson=> 2503, 2803, 3003, 3503

Pala Compatta/Skid Steer Loader: Bobcat=> S130, 751, 753, 763

Trattori/Tractors : Kubota=> L2800, L2900, L3000



TIPO MOTORE / ENGINE TYPE**4D78-V1505****ALESAGGIO**
BORE **78,00 mm****N° CILINDRI**
N° OF CYLINDER **4****CILINDRATA C.C.**
CAPACITY C.C. **1.498**

DESCRIZIONE / DESCRIPTION	CODE	NOTE
SERIE PISTONI /STD PISTON SET WITH RINGS / STD	100-40022	L=69.5 mm COMP. H =69.5 mm SPINOTTO /PIN= 60 mm Ø=22mm
SERIE PISTONI /+0,50 PISTON SET WITH RINGS / +0,50	100-40023	L=69.5 mm COMP. H =69.5 mm SPINOTTO /PIN= 60 mm Ø=22mm
SERIE SEGMENTI /STD RING SET/STD	102-40022	DIAM= 78.00 - 2.0 x 1.5 x 4.0
SERIE SEGMENTI /+0,50 RING SET/+0,50	102-40023	DIAM= 78.00 - 2.0 x 1.5 x 4.0

Applicazioni/Models :

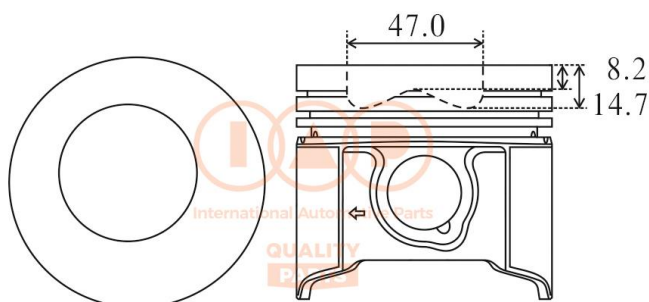
Pala Compatta/Skid Steer Loader: Kubota=> KX91-3, KX71-3, SVL65. Bobcat=> 325, 328, 329, 331, S100, S130, 751, 753, 763. JCB=> 8025 o 8030

Carrello Elevatore/ Forklift : Toyota=> 7FG, 7FD



TIPO MOTORE / ENGINE TYPE
V2403
ALESAGGIO **87,00 mm**
 BORE

N° CILINDRI **4**
 N° OF CYLINDER

CILINDRATA C.C. **2.434**
 CAPACITY C.C


DESCRIZIONE / DESCRIPTION	CODE	NOTE
SERIE PISTONI /STD PISTON SET WITH RINGS / STD	100-40036	L=80mm COMP H.=43.5mm SPINOTTO/PIN 64mm Ø=25mm
SERIE PISTONI /+0,50 PISTON SET WITH RINGS / +0,50	100-40037	L=80mm COMP H.=43.5mm SPINOTTO/PIN 64mm Ø=25mm
SERIE SEGMENTI /STD RING SET/STD	102-40036	DIAM= 87.00 - 2.5 x 2.0 x 5.0
SERIE SEGMENTI /+0,50 RING SET/+0,50	102-40037	DIAM= 87.00 - 2.5 x 2.0 x 5.0
SERIE BRONZ. BIELLA/STD CONNECTING ROD BEARING SET/STD	104-40033	ØALES.O MIN/HOUSING MIN: 50.02mm LARGH.ZA/WIDTH:21,0mm SPESS/THICK:1,495mm
SERIE BRONZ. BIELLA/+0,20 CONNECTING ROD BEARING SET/+0,20	104-40034	ØALES.O MIN/HOUSING MIN: 49.08mm LARGH.ZA/WIDTH:21,0mm SPESS/THICK:1,495mm
SERIE BRONZ. BIELLA/+0,40 CONNECTING ROD BEARING SET/+0,40	104-40035	ØALES.O MIN/HOUSING MIN: 49.06 mm LARGH.ZA/WIDTH:21,0mm SPESS/THICK:1,495mm
SERIE BRONZ. BANCO/STD MAIN BEARING SET /STD	105-40033	ØALES.O MIN/HOUSING MIN: 64.00 mm LARGH.ZA/WIDTH:19 0mm SPESS/THICK:2.0mm
SERIE BRONZ. BANCO/+0,20 MAIN BEARING SET /+0,20	105-40034	ØALES.O MIN/HOUSING MIN: 64.00 mm LARGH.ZA/WIDTH:19 0mm SPESS/THICK:2.0mm
SERIE BRONZ. BANCO/+0,40 MAIN BEARING SET /+0,40	105-40035	ØALES.O MIN/HOUSING MIN: 64.00 mm LARGH.ZA/WIDTH:19 0mm SPESS/THICK:2.0mm

Applicazioni/Models :

Mini Scavatori-/Mini Excavators :Kubota=> KX121, KX161, U45.Komatsu=> PC56-7, Bobcat=> 331, 334 e 337, E45, E50, E55. Eurocomach=> 500 ZT, ES 570 ZT, ES 600 TR. Hyundai=> HSL 650-7 A. Cams=> CZ 42, CZ 50, CZ 54, 755. Wacker Neuson=> DT 25

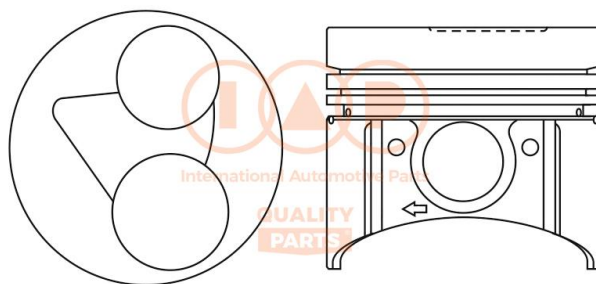


Pala Compatta/Skid Steer Loader: S205, S450, S510, S530, S550, S570, S590, T110, T180, T190, T450, T550, T590

Trattori/Tractors : Kubota=> L4200, L4240, L4300, L4310, L4400, L45, L4610 e L4630, L4330, L4400, L4600, L4740, L4760, MX4700, MX4800, MX5000, MX5100, MX5200.

TIPO MOTORE / ENGINE TYPE
D722
ALESAGGIO **67,00 mm**
 BORE

N° CILINDRI **2**
 N° OF CYLINDER

CILINDRATA **479.0**
 C.C.
 CAPACITY C.C.


DESCRIZIONE / DESCRIPTION	CODE	NOTE
SERIE PISTONI /STD PISTON SET WITH RINGS / STD	100-40012	L=59.1 mm COMP H.=32.7 mm SPINOTTO/PIN 50 mm Ø=20mm
SERIE PISTONI /+0.50 PISTON SET WITH RINGS / +0.50	100-40013	L=59.1 mm COMP H.=32.7 mm SPINOTTO/PIN 50 mm Ø=20mm
SERIE SEGMENTI /STD RING SET/STD	102-40012	DIAM= 67.00 - 1.5 X 1.5 X 3.0
SERIE SEGMENTI /+0.50 RING SET/+0.50	102-40013	DIAM= 67.00 - 1.5 X 1.5 X 3.0
SERIE BRONZ. BIELLA/STD CONNECTING ROD BEARING SET/STD	104-40013	ØALES.O MIN/HOUSING MIN: 37.02mm LARGH.ZA/WIDTH:15,0mm SPESS/THICK:1,505mm
SERIE BRONZ. BIELLA/+0.20 CONNECTING ROD BEARING SET/+0.20	104-40014	ØALES.O MIN/HOUSING MIN: 36.78mm LARGH.ZA/WIDTH:15,0mm SPESS/THICK:1,505mm
SERIE BRONZ. BIELLA/+0.40 CONNECTING ROD BEARING SET/+0.40	104-40015	ØALES.O MIN/HOUSING MIN: 36.58mm LARGH.ZA/WIDTH:15,0mm SPESS/THICK:1,505mm
SERIE BRONZ. BANCO/STD MAIN BEARING SET /STD	105-40010	ØALES.O MIN/HOUSING MIN: 44.00mm LARGH.ZA/WIDTH:18,0mm SPESS/THICK:1,505mm
SERIE BRONZ. BANCO/+0.20 MAIN BEARING SET /+0.20	105-40011	ØALES.O MIN/HOUSING MIN: 43.80mm LARGH.ZA/WIDTH:15,0mm SPESS/THICK:1,505mm
SERIE BRONZ. BANCO/+0.40 MAIN BEARING SET /+0.40	105-40012	ØALES.O MIN/HOUSING MIN: 43.60 mm LARGH.ZA/WIDTH:15,0mm SPESS/THICK:1,505mm
RASAMENTI/STD THRUST BEARING/ STD	106-40010	
VALVOLA ASPIRAZIONE INLET VALVE	110-40010	
VALVOLA SCARICO EXHAUST VALVE	110-40011	



Applicazioni/Models :

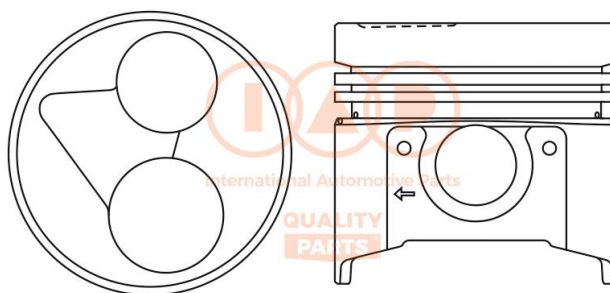
Mini Scavatori-/Mini Excavators : Kubota=> K008-3, K008-5, U10-3. Bobcat=> E08, E10, Doosan=> DX10Z, DX17Z- Takeuchi=> TB014, TB016

Pala Compatta/Skid Steer Loader: Bobcat=>453, 463, S70

Trattori/Tractors : Kubota=>(B series) B1220, B1410, (G series), G18, G1900, G2160.Ventrac=> 3400 series

Refrigeratori Semirimorchi: Thermo King => T-500R, T-580 / T-580R, T-600 / T-600R, T-680 / T-680R, T-800 / T-800R, TS-200, TS-300, TS.500

TIPO MOTORE / ENGINE TYPE

V2203**ALESAGGIO**
BORE **87,00 mm****N° CILINDRI**
N° OF CYLINDER **4****CILINDRATA**
C.C. **2.197**
CAPACITY C.C.

DESCRIZIONE / DESCRIPTION	CODE	NOTE
SERIE PISTONI /STD PISTON SET WITH RINGS / STD	100-40032	L=80mm COMP H.=43.5mm SPINOTTO/PIN 64mm Ø=25mm
SERIE PISTONI /+0.50 PISTON SET WITH RINGS / +0.50	100-40033	L=80mm COMP H.=43.5mm SPINOTTO/PIN 64mm Ø=25mm
SERIE SEGMENTI /STD RING SET/STD	102-40032	DIAM= 87.00 - 2.5 x 2.0 x 5.0
SERIE SEGMENTI /+0.50 RING SET/+0.50	102-40033	DIAM= 87.00 - 2.5 x 2.0 x 5.0
SERIE BRONZ. BIELLA/STD CONNECTING ROD BEARING SET/STD	104-40033	ØALES.O MIN/HOUSING MIN: 50.02mm LARGH.ZA/WIDTH:21,0mm SPESS/THICK:1,495mm
SERIE BRONZ. BIELLA/+0.20 CONNECTING ROD BEARING SET/+0.20	104-40034	ØALES.O MIN/HOUSING MIN: 49.82mm LARGH.ZA/WIDTH:21,0mm SPESS/THICK:1,495mm
SERIE BRONZ. BIELLA/+0.40 CONNECTING ROD BEARING SET/+0.40	104-40035	ØALES.O MIN/HOUSING MIN: 49.62mm LARGH.ZA/WIDTH:21,0mm SPESS/THICK:1,495mm
SERIE BRONZ. BANCO/STD MAIN BEARING SET /STD	105-40033	ØALES.O MIN/HOUSING MIN: 57.0 mm LARGH.ZA/WIDTH:21,0mm SPESS/THICK:1,495mm
SERIE BRONZ. BANCO/+0.20 MAIN BEARING SET /+0.20	105-40034	ØALES.O MIN/HOUSING MIN: 56.80 mm LARGH.ZA/WIDTH:21,0mm SPESS/THICK:1,49
SERIE BRONZ. BANCO/+0.40 MAIN BEARING SET /+0.40	105-40035	ØALES.O MIN/HOUSING MIN: 56,60mm LARGH.ZA/WIDTH:21,0mm SPESS/THICK:1,495mm
RASAMENTI/STD THRUST BEARING/ STD	106-40033	
VALVOLA ASPIRAZIONE INLET VALVE	110-40032	
VALVOLA SCARICO EXHAUST VALVE	110-40033	



GUARNIZIONE SERIE MOTORE
ENGINE GASKET SET

115-40032

C/GUARNIZIONE TESTATA
W/CYLINDER HEAD GASKET

GUARNIZIONE SERIE SMERIGLIO
ENGINE GASKET SET

116-40032

C/GUARNIZIONE TESTATA
W/CYLINDER HEAD GASKET

Applicazioni/Models :

Mini Scavatori-/Mini Excavators: Bobcat=> 331, 334, 337, 341

Pala Compatta/Skid Steer Loader: Bobcat=> 753, 763, 773, 7753, S150, S160, S175, S185.

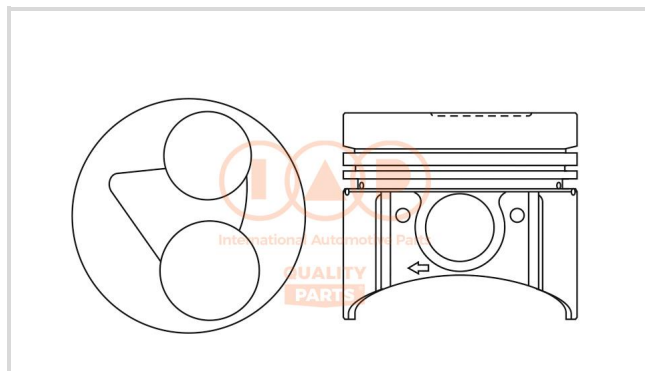
Scavatori/ Excavators: Kubota=> KX121-2, KX121-3, KX161-2, U45. Case/New Holland=> 1840 e 1845C

Trattori/Tractors: L4200, L4300, L4310, M4700, M4800, M4900, M5400. Jacobsen=> HR5111, HR4602, LF3400, LF3800. Toro=> Reelmaster 5400-D, 5500-D, Groundsmaster 3500-D, 4500-D.

Carrello Elevatore/ Forklift: Toyota=> Series 7/8. TCM=> FD20, FD25, FD30. Hyster/Yale=> H2.00-3.00DX / GLP20-30VX

Refrigeratori Semirimorchi: Thermo King=> SB-210 / SB-210+, SB-200, SB-230, SB-310, SB-330, SB-400, SB-III



TIPO MOTORE / ENGINE TYPE
Z482
ALESAGGIO
BORE **67,00 mm**
N° CILINDRI
N° OF CYLINDER **2**
CILINDRATA C.C.
CAPACITY C.C. **479**


DESCRIZIONE / DESCRIPTION	CODE	NOTE
SERIE PISTONI /STD PISTON SET WITH RINGS / STD		L=59.1 mm COMP H.=32.7 mm SPINOTTO/PIN 50 mm Ø=20mm
	100-40010	
SERIE PISTONI /+0.50 PISTON SET WITH RINGS / +0.50		L=59.1 mm COMP H.=32.7 mm SPINOTTO/PIN 50 mm Ø=20mm
	100-40011	
SERIE SEGMENTI /STD RING SET/STD		DIAM= 67.00 - 1.5 X 1.5 X 3.0
	102-40010	
SERIE SEGMENTI /+0.50 RING SET/+0.50		DIAM= 67.00 - 1.5 X 1.5 X 3.0
	102-40011	
SERIE BRONZ. BIELLA/STD CONNECTING ROD BEARING SET/STD		ØALES.O MIN/HOUSING MIN: 37.02 mm LARGH.ZA/WIDTH:15,0mm SPESS/THICK:1,505mm
	104-40010	
SERIE BRONZ. BIELLA/+0.20 CONNECTING ROD BEARING SET/+0.20		ØALES.O MIN/HOUSING MIN: 36.88 mm LARGH.ZA/WIDTH:15,0mm SPESS/THICK:1,505mm
	104-40011	
SERIE BRONZ. BIELLA/+0.40 CONNECTING ROD BEARING SET/+0.40		ØALES.O MIN/HOUSING MIN: 36.68 mm LARGH.ZA/WIDTH:15,0mm SPESS/THICK:1,505mm
	104-40012	
SERIE BRONZ. BANCO/STD MAIN BEARING SET /STD		ØALES.O MIN/HOUSING MIN:48.00mm LARGH.ZA/WIDTH:18.01mmSPESS/THICK:1,50mm
	105-40010	
SERIE BRONZ. BANCO/+0.20 MAIN BEARING SET /+0.20		ØALES.O MIN/HOUSING MIN:47.80mm LARGH.ZA/WIDTH:18.01mmSPESS/THICK:1,50mm
	105-40011	
SERIE BRONZ. BANCO/+0.40 MAIN BEARING SET /+0.40		ØALES.O MIN/HOUSING MIN:47.60mm LARGH.ZA/WIDTH:18.01mmSPESS/THICK:1,50mm
	105-40012	
VALVOLA ASPIRAZIONE INLET VALVE	110-40010	
VALVOLA SCARICO EXHAUST VALVE	110-40011	

Applicazioni/Models :
Mini Scavatori-/Mini Excavators: Kubota=> K008/ K008-3/ U10-3.JCB=> 8008 Series.

Refrigeratori Semirimorchi/ Unità Ausiliarie: Thermo king => TriPac Evolution, TriPac Envidia, T-500 e T-600, V-500


1.3 Altri articoli / Other items

SERIE SEGMENTI /STD RING SET/STD	102-40034	CODICE MOTORE/ENGINE CODE: 5D87- F2803 2.8D 5cil.
SERIE SEGMENTI /+0.50 RING SET/+0.50	102-40035	CODICE MOTORE/ENGINE CODE: 5D87- F2803 2.8D 5cil.
RASAMENTI/STD THRUST BEARING/ STD	106-40010	CODICE MOTORE/ENGINE CODE: D750
SERIE GUARNIZIONE MOTORE ENGINE GASKET SET	115-40030	CODICE MOTORE/ENGINE CODE:: KUBOTA 3D72-D850-D905-D902 3cil.
SPINGIDISCO FRIZIONE PRESSURE PLATE	202-40010	KUBOTA TRACTOR B4200/5100/6000
SPINGIDISCO FRIZIONE PRESSURE PLATE	202-40011	KUBOTA TRACTOR B1700/2100/8200
DISCO FRIZIONE CLUTCH DISC	203-40010	KUBOTA TRACTOR B4200/5100/6000
DISCO FRIZIONE CLUTCH DISC	203-40011	KUBOTA TRACTOR B1700/2100/8200
CUSCINETTO FRIZIONE RELEASE CLUTCH BEARING	204-40010	KUBOTA TRACTOR B1700/2100/8200
CUSCINETTO FRIZIONE RELEASE CLUTCH BEARING	204-40011	KUBOTA TRACTOR B4200/5100/6000
ALTERNATORE ALTERNATOR	802-40001	12V-40 A KUBOTA B1550/D2410/B2150/L3410/L4610
ALTERNATORE ALTERNATOR	802-40002	12V- 45 A KUBOTA M9000
ALTERNATORE ALTERNATOR	802-40003	12V- 55 A KUBOTA RTV900#
ALTERNATORE ALTERNATOR	802-40004	12V-40A CODICE MOTORE/ENGINE CODE: Z402/Z602 diesel
MOTORINO DI AVVIAMENTO STARTER MOTOR	803-40001	12V 1.4 KW- KUBOTA KH/KX/L285/GV/L3600/L4200
MOTORINO DI AVVIAMENTO STARTER MOTOR	803-40003	12V 1.0 KW- KUBOTA DM1102 01/1981>
MOTORINO DI AVVIAMENTO STARTER MOTOR	803-40004	12V 2.0 KW- KUBOTA V1502/V1902





**Il nome e il logo IAP e QUALITY PARTS
sono marchi registrati da**

**IAP and QUALITY PARTS
name and logo are trademark of**

**Le nom et le logo IAP e QUALITY PARTS
ce sont des marques desposées par**

**El nombre y el logotipo IAP e QUALITY PARTS
son marcas registradas por**

**Der Name und das Logo IAP e QUALITY PARTS
sind eingetragene Marken von**

**I.A.P. International Automotive Parts srl
Calderara di Reno, Bologna, Italy
www.iapqualityparts.com**

